

FLOW SWITCH

FCS SERIES – Flow Switch made from Noryl

FCS-02

Design Features

- Rugged High Grade Noryl
- Minimal pressure drop
- Operates from a small head of water
- Mount in any axis
- Suitable for water and air flow switching



Product Comments

- 3/8" NPT Male threaded fittings
- Suitable for hot and cold portable water
- Reed Switch reliability
- Meets UL 94-HB flammability rating
- Easy installation
- Food Grade Material


Typical Applications

- Leak Detection
- Flow Sensing
- Mains water control
- Cooling systems
- Circulating Pump Protection

Material, Design and Operation

Mounting:	Flow Switch Vertical or Horizontal
Material:	Noryl
Fitting	Flow Switch 3/8" NPT
Contact Form:	Form A -SPST
Contact Material:	Ruthenium
Maximum Watts	15 Watts
Maximum Switching Volts:	250 VAC
Maximum Switching Current:	1.0 A
Cable Type:	2 x 22AWG, 16/0.2mm PVC insulated 0.5m long to UL/CSA/BS6361
Cable Colour:	Black/Black
Operating Temperature Range:	85 °C
Medium/Liquid:	Water
Flow Rate:	0.6 litres/min
Mounting Shock:	50g for 11ms duration
Mounting Vibration:	35g up to 500Hz
Approvals:	Meets UL 94-HB flammability rating
Mounting:	Flow Switch Vertical or Horizontal
Material:	Noryl
Fitting	Flow Switch 3/8" NPT

Line Drawing

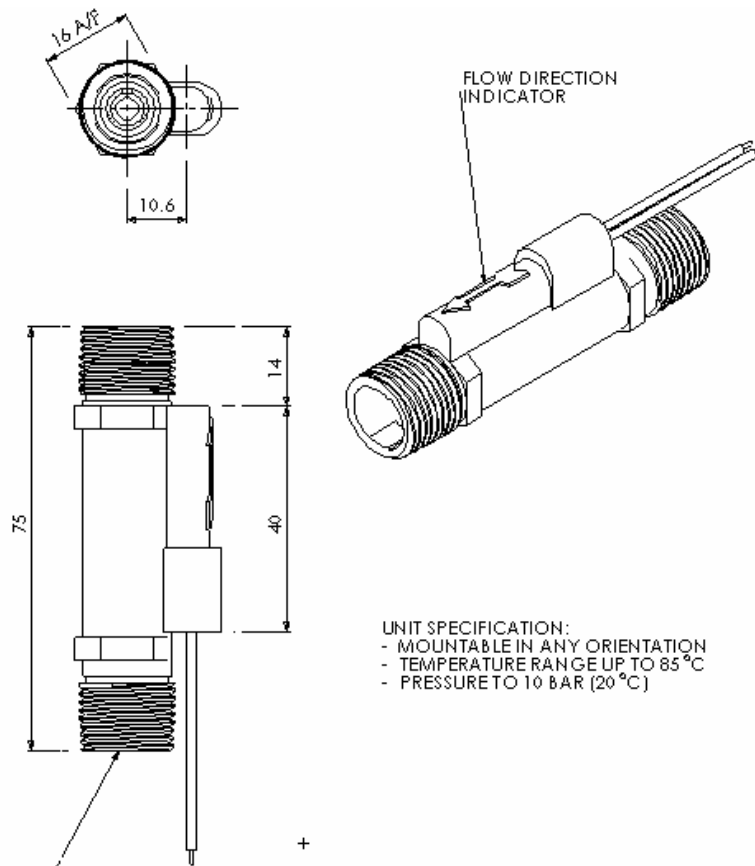

Installation

- Pipework to be cut square and burr free
- Compression fitting mating connectors to be of suitable quality.
- The installation should be checked to ensure that no leaking is evident.
- Pipework/connector alignment imperative (avoiding bending stress).